

# Dr's Light 2

Multi-Purpose Dental Light

Master of Dental Light
















-IC-WHT60 -IC-WH61  
-IC-DCAM70 -IC-DCAU71  
-IC-WHC50 -IC-EZAU81

-CL-DLT30 -CL-DL10  
-CL-DC20 -CL-AT24

-AL-DF10



# Master of Dental Light

## 1 Features of Drs Light2

-  **Dual wavelength LED**  
Can polymerize for any kinds of material with dual wavelength (peak 405 & 460 nm)
-  **Wide irradiate area**  
Can polymerize for wider area with 11 mm diameter.
-  **Various curing mode**  
Power (Ortho mode included), Turbo, High, Low, Softstart, Pulse modes
-  **Adjustable angle**  
Transformable straight, hybrid, and gun shapes.
-  **Focused light**  
Focused LED light increase its performance.
-  **Big capacity & interchangeable battery**  
Applied big Samsung battery cell for long using time and life.
-  **Auto on/off**  
Grip the device and the device is turn on.
-  **280° twistable head**  
Can approach any where in oral cavity.
-  **Color OLED screen**  
Show device states on clear OLED screen.
-  **Soft lens**  
Easy to interchangeable if it get dirty or damage.
-  **Slim head (15mm)**  
Easy to approach anywhere in oral cavity.
-  **Various accessories**  
Various purpose head available. FL, Trans, WA head.
-  **Timer mode**  
Device can be use as timer.

## 2 Program modes

Six curing programs are available in this device.

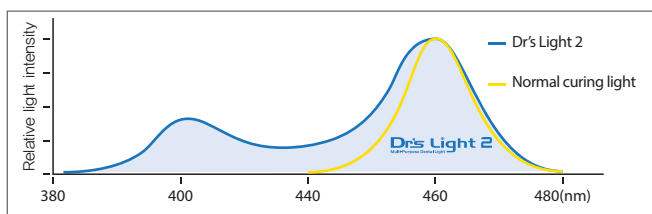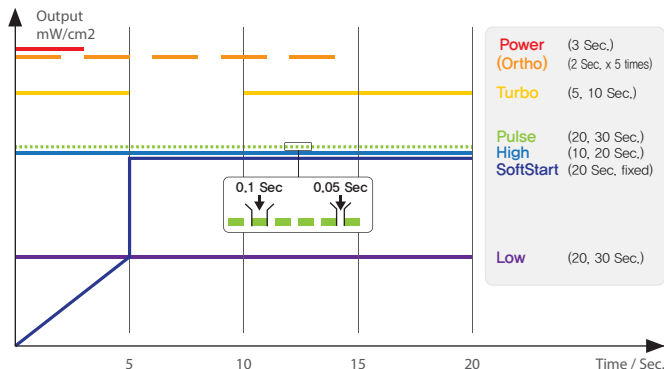

## 3 Various accessories [Option]



### FL head (Fluorescence)

Finding early carious, plaque, and etc.



### Trans head (Trans Illumination)

Finding crack, proximal carious, and etc.



### WA head (Wide Angle)

Whitening accelerator, wide surface orthodontic bracket bonding, and etc.

## 4 WA Kit [Option]



## 5 Specification

Handpiece (included curing light head)	Operation voltage	3.7V
	Peak wavelength	405nm & 460nm
	Measurement	Approx. 273 x 45 x 39 mm
	Weight	Approx. 114 g
Charger	Operation voltage	5V
	Measurement	Approx. 169 x 148 x 89 mm
	Weight	Approx. 170 g
Battery	Type	Lithium Ion battery
	Nominal voltage	DC 3.7V
	Measurement	Approx. 80 x 27 x 30mm
	Weight	Approx. 56g
Disposable cover	Quantity	Approx. 100 pcs by weight x 2ea
	Raw material	Polyethylene
Adapter	Input voltage	AC 100 ~ 240 V
	Output voltage	DC 5V 2A
	UL number	E333054